

## SYSTEM DATA SHEET

# Sika Comfortfloor® PS-66

SEAMLESS, SMOOTH, LOW VOC, SOUND INSULATING, ELASTIC  
POLYURETHANE FLOOR COVERING WITH OPTIONAL COLOUR  
FLAKES

### DESCRIPTION

Sika Comfortfloor® PS-66 is an elastic polyurethane self-smoothing flooring system and is part of the Sika Comfortfloor® decorative flooring range. Sika Comfortfloor® PS-66 optimizes a balance between comfort and aesthetics by combining softness under foot and individual design.

Sika Comfortfloor® PS-66 is an ergonomic, sound dampening, low emission floor which is UV stable, highly aesthetical, easy to care for and to maintain and is especially designed for indoor applications where high comfort under feet, individual design, a jointless surface and soft footfall are required.

### USES

Sika Comfortfloor® PS-66 may only be used by experienced professionals.

- Commercial and public buildings
- Healthcare facilities
- Schools
- Retail spaces & laboratories
- Nursing facilities
- Showrooms & lobbies
- Museums and office space.

### CHARACTERISTICS / ADVANTAGES

- Low VOC emission
- Highly decorative
- Flexible and resilient
- Very good acoustic isolation
- Good mechanical resistance
- Good UV resistance
- Reduces footfall sound

- Attractive colours available using pigmented UV stable base coat
- Non shrinking after cure
- High strength
- Low maintenance and life cycle cost
- Tough, durable and seamless floor

### ENVIRONMENTAL INFORMATION

- Emissions tested at Eurofins according to the AgBB- and CDPH rule 01350 schemes and guidelines. Sampling, testing and evaluation were performed according to ISO-16000, Reports No. 770028A


### APPROVALS / STANDARDS

- Reaction to Fire classification according to DIN EN 13501-1. Test institute Hoch Report No. KB-Hoch-141425 for the Sika Comfortfloor® Decorative Pro.
- Cleanroom® suitable material as part of the Sika ComfortFloor® Decorative Pro system sealed with Sikafloor®-304W. Tested on Biological resistance by Fraunhofer IPA, Germany report no. SI 1008- 533
- Impact sound reduction according EN ISO 140-8, test report 102-B-08, iba Institut Gottfried & Rolof Germany.
- Determination of wear resistance EN651:2004 , indentation EN 433:2004, and effect of simulated movement of furniture leg according EN 424:2002 reports 391582-02 TFI institute Aachen Germany.

# SYSTEM INFORMATION

## System Structure

## Sika Comfortfloor® PS-66

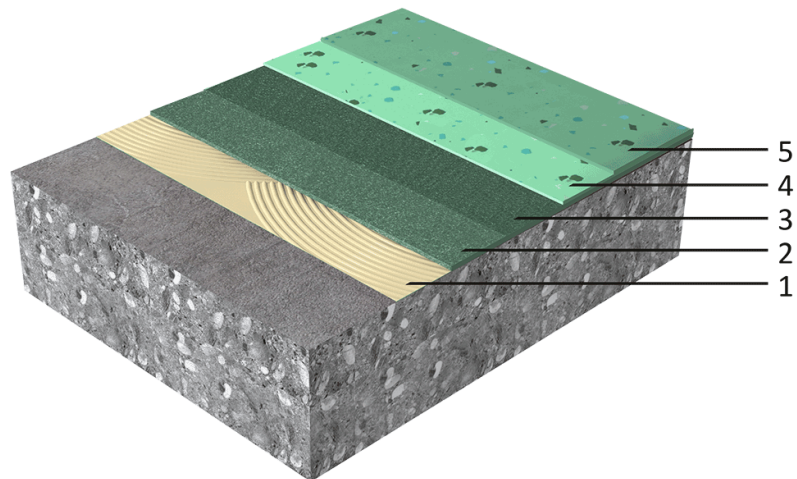

Layer	Product	Consumption
1. Adhesive	Sikafloor® -Comfort Adhesive	~ 0.9 kg/m <sup>2</sup>
2. Shockpad	Sikafloor® -Comfort Regupol® 4580	~ 4 mm
3. Porefiller	Sikafloor® -Comfort Porefiller	~ 0.4 kg/m <sup>2</sup> /layer
4. Base coat	Sikafloor® -3000	~ 2.8kg/m <sup>2</sup> (2 mm)
5. Top coat	Sikafloor® -304W	~ 0.15 kg/m <sup>2</sup> /layer

Consumptions are theoretical and do not include any wastage or additional materials needed due to porosity, substrate profile etc.

As optional primers Sikafloor® -144/-159/-160 can be used. Please refer to the individual Product Data Sheet.

As optional base coats Sikafloor® -300 can be used. Note that the approvals on emissions will be affected. Please refer to the individual Product Data Sheet.

<b>Chemical Base</b>	Polyurethane
<b>Appearance</b>	Smooth, matt finish
<b>Colour</b>	Available in almost unlimited choice of colour shades.
<b>Nominal Thickness</b>	~ 6 mm
<b>Volatile organic compound (VOC) content</b>	Very low content of Volatile Organic Compounds. It fulfils the stringent demands for indoor air quality and low VOC emitting products AgBB

## TECHNICAL INFORMATION

<b>Shore A Hardness</b>	~ 84 (14 days/+23°C)	(DIN 53505)
<b>Resistance to Wearing</b>	Wearing group M	(EN 660-2:1999)
<b>Resistance to moving furniture</b>	No damage	(EN 424:2002)
<b>Castor chair resistance</b>	No damage (25000 cycles)	(EN 425:1994)
<b>Resistance to Impact</b>	Class II	(ISO 6272)
<b>Indentation</b>	~ 0.1 mm	(EN 433:1994)
<b>Tensile Adhesion Strength</b>	> 1.5 N/mm <sup>2</sup>	(EN 13892-8)
<b>Reaction to Fire</b>	Cfl-s1	(EN 13501-1)
<b>Chemical Resistance</b>	Sika Comfortfloor® PS-66 always has to be sealed with Sikafloor®-304 W. Refer to the chemical resistance of Sikafloor®-304 W.	
<b>Capillary Absorption</b>	< 0.01 kg/(m <sup>2</sup> h <sup>0,5</sup> )	(EN 1062-3)

Permeability to Carbon Dioxide	> 50 meter	(EN 1062-6)
Sound Insulation	17 dB	(EN ISO 140-8)
Skid / Slip Resistance	R10	(DIN 51130)

## APPLICATION INFORMATION

Product Temperature	+15°C min. / +30°C max.		
Ambient Air Temperature	+15°C min. / +30°C max.		
Relative Air Humidity	80% max.		
Dew Point	Beware of condensation! The substrate and uncured floor must be at least 3°C above dew point to reduce the risk of condensation or other disturbance of the surface on the floor finish		
Substrate Temperature	+15°C min. / +30°C max.		
Substrate Moisture Content	Sika Comfortfloor® PS-66 can be installed on substrates with moisture content of max. 4% (checked by Tramex). The substrate needs to be visibly dry and have adequate pull-off strength min 1.5 N/mm <sup>2</sup> . Check rising moisture.		
Applied Product Ready for Use	<b>Temperature</b>	<b>Foot traffic</b>	<b>Light traffic</b>
	+15°C	~ 30 hours	~ 48 hours
	+20°C	~ 16 hours	~ 24 hours
	+30°C	~ 12 hours	~ 18 hours
			<b>Full cure</b>
			~ 6 days
			~ 4 days
			~ 3 days

Note: Times are approximate and will be affected by changing ambient and substrate conditions

## PRODUCT INFORMATION

Packaging	Please refer to the individual Product Data Sheets
Shelf Life	Please refer to the individual Product Data Sheets
Storage Conditions	Please refer to the individual Product Data Sheets

## MAINTENANCE

### CLEANING

Please refer to the Sikafloor®- Cleaning Regime

## FURTHER DOCUMENTS

### Substrate Quality & Preparation

Please refer to Sika Method Statement: "Evaluation and preparation of surfaces for flooring systems".

### Application Instructions

Please refer to Sika Method Statement: "Mixing & Application of flooring systems".

### Maintenance

Please refer to "Sikafloor®- Cleaning regime".

## LIMITATIONS

- Freshly applied Sikafloor® products must be protected from damp, condensation and water for at least 24 hours.
- Uncured material reacts in contact with water (foaming).
- During application care must be taken that no sweat drops into fresh Sikafloor® products (wear head and wrist bands).
- For exact colour matching, ensure the Sikafloor®

product in each area is applied from the same control batch number.

- Under certain conditions, underfloor heating or high ambient temperatures combined with high point loading, may lead to imprints in the resin.
- If heating is required do not use gas, oil, paraffin or other fossil fuel heaters, these produce large quantities of both CO<sub>2</sub> and H<sub>2</sub>O water vapour, which may adversely affect the finish. For heating use only electric powered warm air blower systems.

## BASIS OF PRODUCT DATA

All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

## LOCAL RESTRICTIONS

Please note that as a result of specific local regulations the declared data for this product may vary from country to country. Please consult the local Product Data Sheet for the exact product data.

## ECOLOGY, HEALTH AND SAFETY

For information and advice on the safe handling, storage and disposal of chemical products, users shall refer

to the most recent Safety Data Sheet (SDS) containing physical, ecological, toxicological and other safety-related data.

## LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

### Sika Services AG

Tüffenwies 16  
8048 Zürich  
Tel: +41 58 436 4040  
[www.sika.com](http://www.sika.com)



SikaComfortfloorPS-66\_en\_(04-2016)\_1.pdf

### SYSTEM DATA SHEET

Sika Comfortfloor® PS-66  
April 2016, Version 01.0  
ID No.: 020812900000000004